



Vault



C-Scroll



Roundel


These installation instructions are valid with the above Ametrix styles.

## Large, INDOOR P2R

(Pendant, 2-way, Remote ballast)  
**Visor and Non-Visor**

**Warning:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.


### Exploded view and part call-out

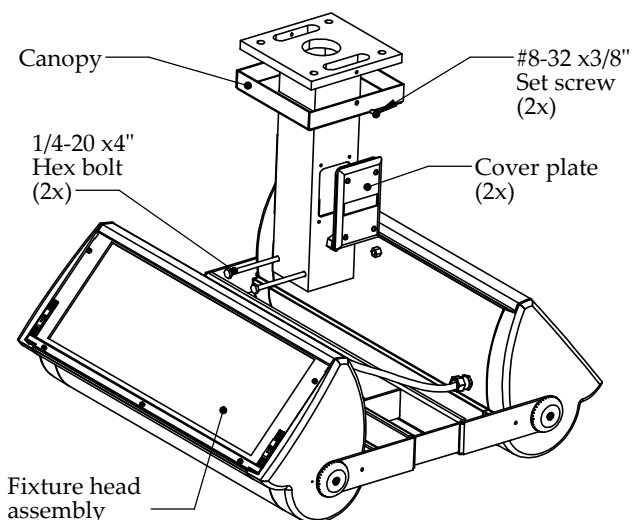

**Attention:**  
Large fixtures require additional bracing/structure around J-box to support fixture.

1


### Mounting pendant to ceiling

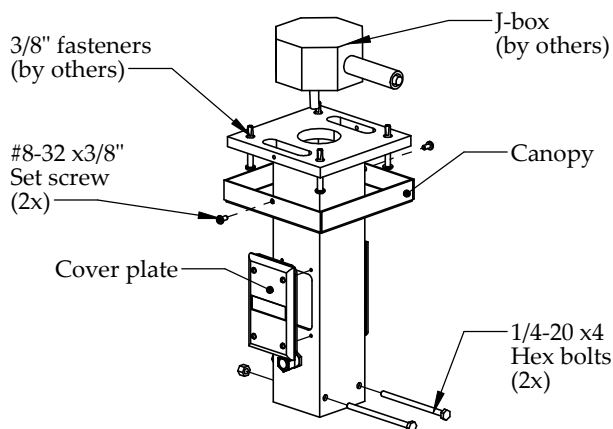

1. Remove both 1/4-20 x4 hex bolts from bottom of pendant.
2. Remove both #8-32 x3/8" set screws and allow canopy to slide down pendant.
3. Run wires from J-box into pendant, ensure there is enough wire to reach cover plate.
4. Using appropriate fasteners, secure fixture to ceiling. Use **additional bracing around J-box to support fixture.**
5. Replace canopy and secure using both set screws.

2


### Wiring the fixture

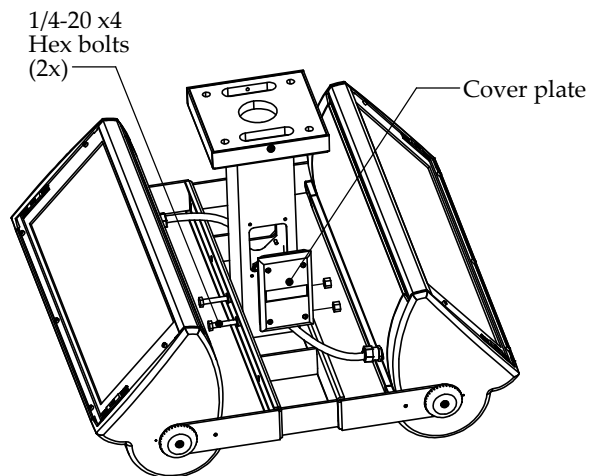




1. Slide fixture assembly onto pendant and secure with both 1/4-20 x4 hex bolts.
2. Attach appropriate wires and ensure all connections are properly matched
3. Secure cover plate

3

### Aiming the fixture

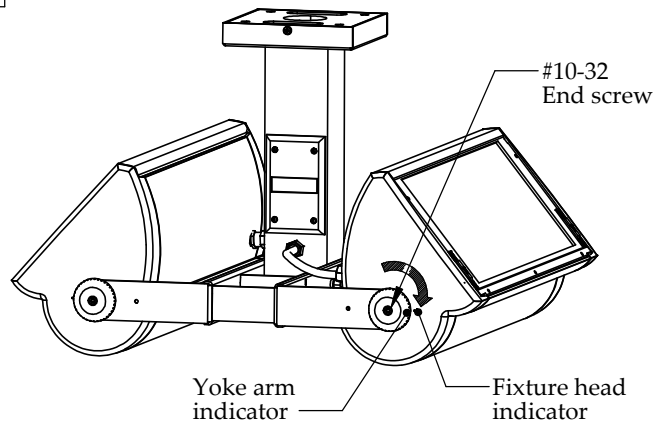

1. To aim fixtures, loosen both #10-32 end screws on **one** fixture. When both indicators are lined up, the slope of the lens face is 40-degrees. Each subsequent notch is an additional +/- 10-degrees.
2. When fixture head is rotated to the desired angle, retighten **end screws to secure the position.**
3. Repeat for second fixture head.






These installation instructions are valid with the above Ametrix styles

## Large, INDOOR P2R (Pendant, 2-way, Remote ballast) Visor and Non-Visor


**Warning:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

### Mounting plate dimensions In[mm]

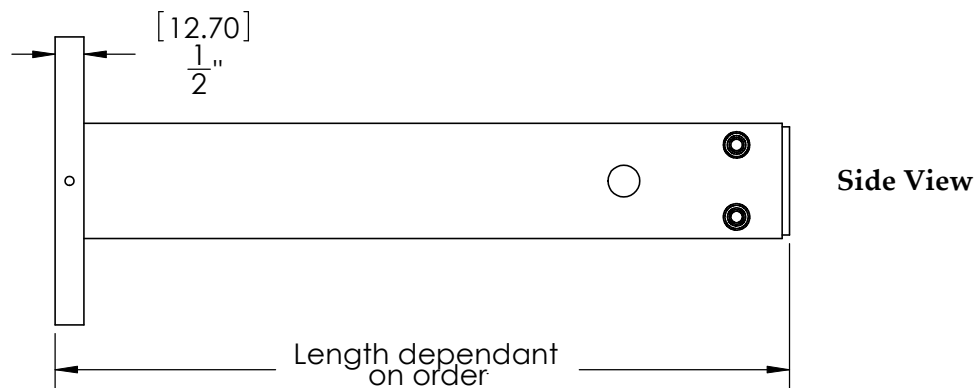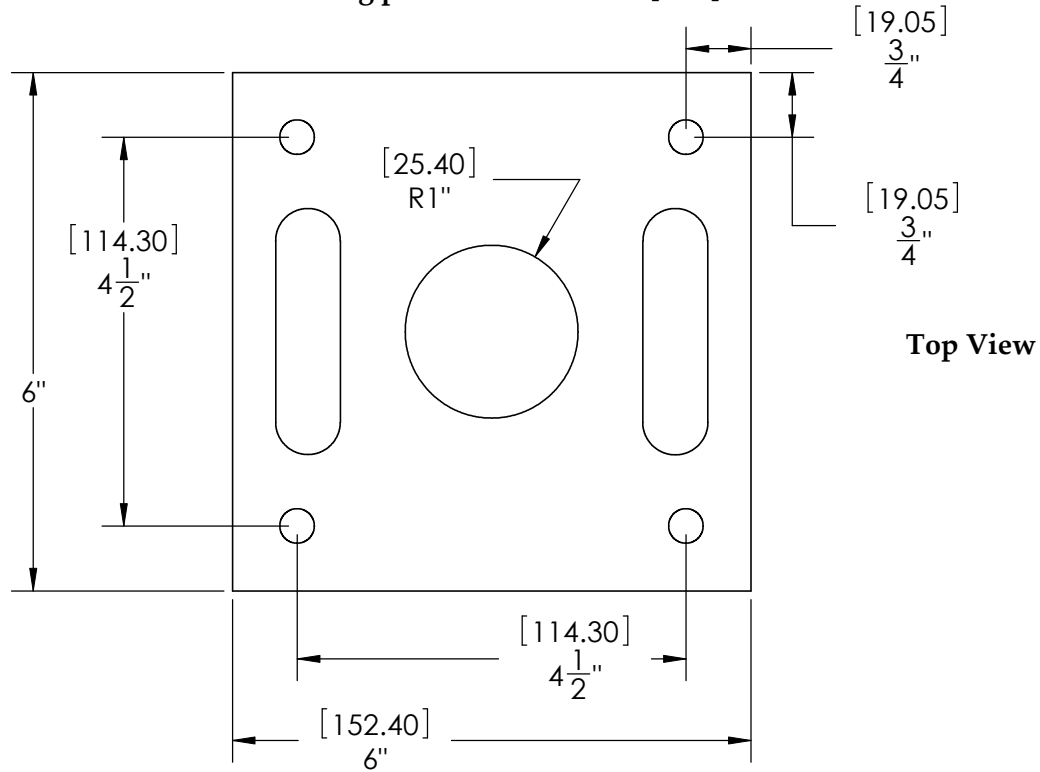




Vault w/ visor



C-Scroll w/ visor



Roundel w/ visor

These installation instructions are valid with the above Ametrix styles











## Large, INDOOR P2R

(Pendant, 2-way, Remote ballast)  
**Visor and Non-Visor**

**Warning:** Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

### Lamping Size Chart

(lamps provided by others)

FIXTURE SIZE (inches/ mm)	WATTAGE	# OF LAMPS	LAMP TYPE	LAMP DESCRIPTION	Lamp (not to scale)
16 1/2 / 419.1	32 W	1	T4	Compact Fluorescent	
16 1/2 / 419.1	42 W	1	T4	Compact Fluorescent	
16 1/2 / 419.1	57 W	1	T4	Compact Fluorescent	
16 1/2 / 419.1	100 W	1	ED17	Ceramic Metal Halide	
16 1/2 / 419.1	150 W	1	T6	Ceramic Metal Halide	
16 1/2 / 419.1	175 W	1	ED17	Ceramic Metal Halide	
22 1/2 / 571.5 mm	250 W	1	ET18	Metal Halide	
22 1/2 / 571.5 mm	400 W	1	ET18	Metal Halide	
22 1/2 / 571.5 mm	150 W	2	T6	Ceramic Metal Halide	
22 1/2 / 571.5 mm	32 W	2	T4	Compact Fluorescent	
22 1/2 / 571.5 mm	42 W	2	T4	Compact Fluorescent	
22 1/2 / 571.5 mm	250 W	1	ET18	Metal Halide	
22 1/2 / 571.5 mm	400 W	1	ET18	Metal Halide	
22 1/2 / 571.5 mm	150 W	2	T6	Ceramic Metal Halide	
22 1/2 / 571.5 mm	350 W	1	T3	Halogen(Double Ended)	
22 1/2 / 571.5 mm	500 W	1	T3	Halogen(Double Ended)	
30 1/2 / 774.7	36 W	1	T5	Twin Tube	
30 1/2 / 774.7	40 W	1	T5	Twin Tube	
30 1/2 / 774.7	50 W	1	T5	Twin Tube	
30 1/2 / 774.7	55 W	1	T5	Twin Tube	
30 1/2 / 774.7	36 W	2	T5	Twin Tube	
30 1/2 / 774.7	40 W	2	T5	Twin Tube	
30 1/2 / 774.7	50 W	2	T5	Twin Tube	
30 1/2 / 774.7	55 W	2	T5	Twin Tube	
30 1/2 / 774.7	250 W	2	ET18	Metal Halide	
30 1/2 / 774.7	400 W	2	ET18	Metal Halide	
30 1/2 / 774.7	900 W	1	T3	Halogen(Double Ended)	
30 1/2 / 774.7	1000 W	1	T3	Halogen(Double Ended)	